

Uniclass L7522	EPIC L22
CI/SfB (56.84)	X




Wireless Heating Systems

SPACE SAVING RADIANT PANEL BRUSHED STAINLESS STEEL OR MIRROR FINISH with Wireless Time and Temperature Control



BRUSHED STAINLESS STEEL

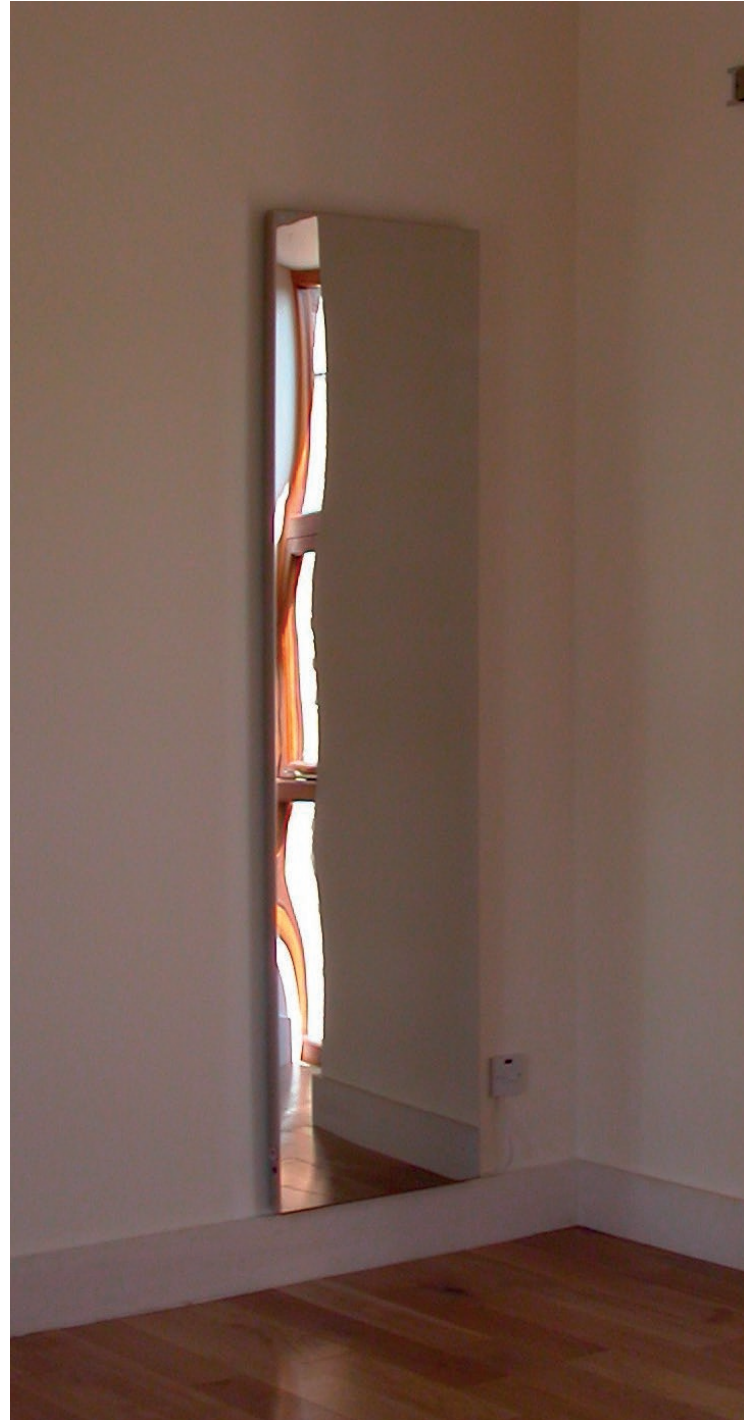

MIRROR FINISH BRUSHED STAINLESS STEEL



A simple to install wireless controlled heating system for the whole home and commercial applications. Perfect for apartments, public areas, offices, showrooms, shops, nurseries, schools, retirement homes and healthcare!


RADIATOR (RECEIVER) KEY FEATURES:

Simply wire the heater to a fuse spur / Hidden wiring / No need to manually switch heaters "on" or "off"

WIRELESS CONTROLLER (TRANSMITTER) KEY FEATURES:

Keylock mode / Simple to Programme / Up to 6 temperature settings per day / 7 day clock / Advance mode / Economy mode / Holiday mode / Boost Mode / Inbuilt room temperature sensor / Frost protection / Powered by 2 x 1.5v Alkaline batteries

The TX control unit sends a 433MHz radio signal to each "registered" heater within a radius of 30 metres. Each RX panel heater has an inbuilt receiver designed to respond to a signal from the WCT 100/RX.

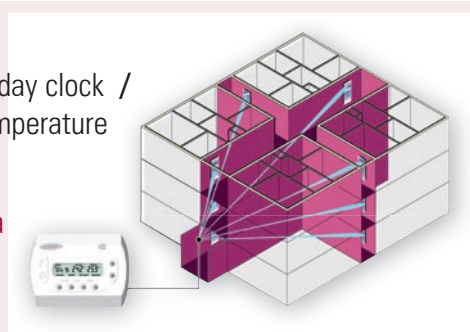


SPECIFICATION:

LINE REF	CODE	DIMENSIONS (W X H X D)	ELEMENT (WATTS)	OUTPUT (WATTS)	OUTPUT (BTU'S)
Brushed Stainless Steel					
19.1	ECO 1000DLL/RP/SS/RX/V	500 x 2000 x 40	1000	980	3343
19.2	ECO 1000DL/RP/SS/RX/V	500 x 1500 x 40	1000	735	2507
19.3	ECO 500DLL/RP/SS/RX/V	500 x 1000 x 40	500	490	1671
Mirror Finish					
19.4	ECO 1000DLL/RP/MF/RX/V	500 x 2000 x 40	1000	680	2194
19.5	ECO 1000DL/RP/MF/RX/V	500 x 1500 x 40	1000	500	1706
19.6	ECO 500DLL/RP/MF/RX/V	500 x 1000 x 40	500	336	1146

ALSO AVAILABLE IN HORIZONTAL FORMAT, WHEN ORDERING SIMPLY CHANGE THE LAST LETTER OF THE MODEL FROM 'V' TO 'H'

TEMPERATURE RANGE: STANDARD 70°C

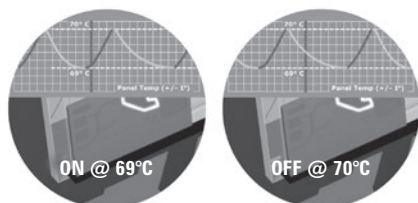

Sharrocks Street, Wolverhampton WV1 3RP

Tel: 01902 457575 Fax: 01902 457797 Email: sales@ecolec.co.uk Website: www.ecolec.co.uk