

**ENERGY SAVING AMBIENT LED LIGHTING** 

# TRAPEZIUM ANTI-GLARE LED MIRROR RADIATOR







AUR 500D/PC/IP44/MR/LED - MOUNTED WITH SIDE LIGHTS



AUR 500D/PC/IP44/MR/LED - MOUNTED WITH UP & DOWN LIGHTS


### **RADIATOR (RECEIVER) KEY FEATURES:**

Simply wire the heater to a fuse spur / Hidden wiring / No need to manually switch heaters "on" or "off" if using wireless controller

## WIRELESS HEATER TIMER & LED DIMMER (TRANSMITTER) KEY FEATURES:

4 Hour timer / LED light dimmer / Simple to Programme / Powered by 2 x 1.5v Alkaline batteries


The TX control unit sends a 433MHz radio signal to each "registered" heater within a radius of 30 metres. Each RX panel heater has an inbuilt receiver designed to respond to a signal from the WCT 600/TX.

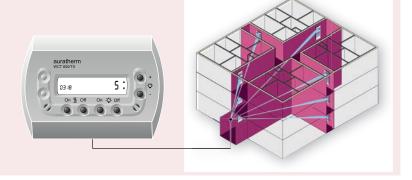


#### **SPECIFICATION:**

LINE REF	CODE	DIMENSIONS (H X W X D) MM	LED (WATTS)	ELEMENT (WATTS)	OUTPUT (WATTS)	OUTPUT (BTU'S)
	Powder Coated White					
17.1	AUR 500D/PC/IP44/MR/LED/V	500 x 500 x 44	10	500	300	1023
17.2	AUR 1000D/PC/IP44/MR/LED/V	1000 x 500 x 44	20	1000	600	2046
17.3	AUR 1500D/PC/IP44/MR/LED/V	1500 x 500 x 44	30	1500	900	3070
17.4	AUR 750D/SB/PC/IP44/MR/LED/V	1500 x 250 x 44	30	750	450	2046

#### **DIAGRAM:**

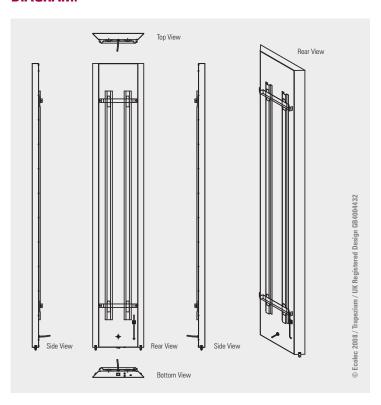

#### **TEMPERATURE RANGE: STANDARD 70°C**





Trapezium / UK Registered Design GB4004432

Sharrocks Street, Wolverhampton WV1 3RP

Tel: 01902 457575 Fax: 01902 457797

Email: auratherm@ecolec.co.uk Website: www.ecolec.co.uk/auratherm