

auratherm®

Lot 20
compliant


CURVE AMBIENTE
AMBIENT HEAT · AMBIENT LIGHT

CURVE ANTI-GLARE LED RADIATOR



1 x AUR 750D/PC/IP44/CUR/LED/V
- Powder Coated White, RAL 9016
- 500x1500x62mm



- The unique design of the CURVE unit allows the light to bounce off the wall, therefore reducing eye strain caused by the direct LED source.
- Available in Powder Coated White RAL 9016. Other RAL colours, please phone for details.
- All units can be mounted vertically or horizontally giving you the option of both uplighting or sidelighting.

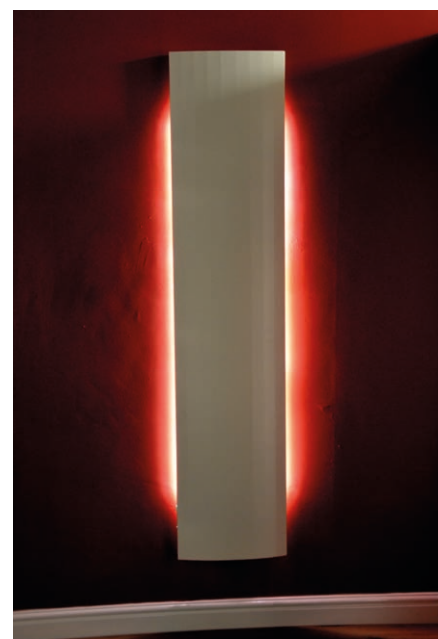

To help preserve the environment, and as part of its sustainability policy, Ecolec offer a **Do Not Scrap** return-to-base full refit and refurbishment service.

A simple 3 point plan!

- **Measure Room Sizes**
- **Calculate Heat Loss**
- **Select Radiator**

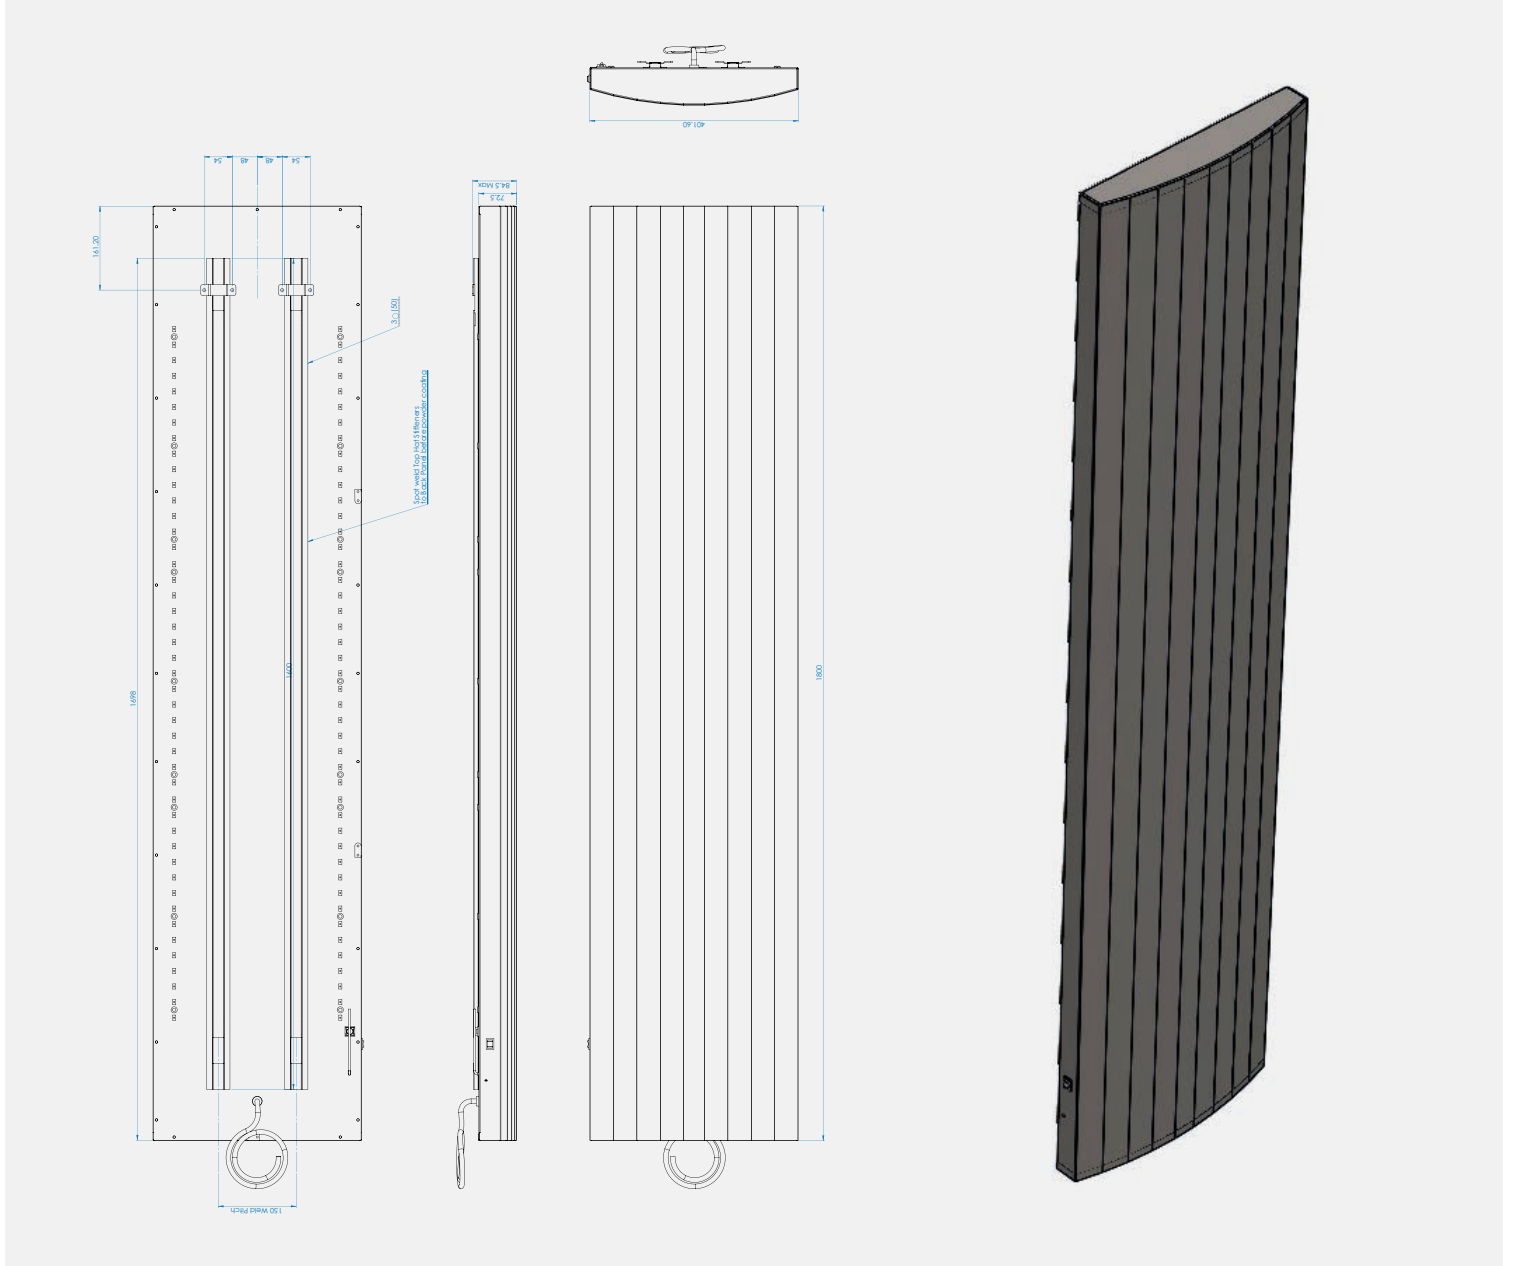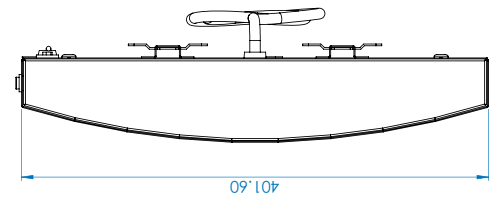

COLOUR OPTIONS

	RAL 1014 IVORY		RAL 6019 PASTEL GREEN
	RAL 1015 LIGHT IVORY		RAL 6034 PASTEL TURQUOISE
	RAL 5008 GREY BLUE		RAL 7016 ANTHRACITE GREY
	RAL 3003 RUBY RED		RAL 7024 GRAPHITE GREY
	RAL 3022 SALMON PINK		RAL 7032 PEBBLE GREY
	RAL 4009 PASTEL VIOLET		RAL 7047 TELE GREY
	RAL 5002 ULTRAMARINE BLUE		RAL 8004 COPPER BROWN
	RAL 5015 SKY BLUE		RAL 8017 CHOCOLATE BROWN
	RAL 5024 PASTEL BLUE		RAL 9001 CREAM

RADIATOR (RECEIVER) KEY FEATURES:

Simply wire the heater to a fuse spur / Hidden wiring /


No need to manually switch heaters "on" or "off" if using wireless controller

WIRELESS HEATER TIMER & LED DIMMER

(TRANSMITTER) KEY FEATURES:

4 Hour timer / LED light dimmer / Simple to Programme / Powered by 2 x 1.5v Alkaline batteries

The TX control unit sends a 433MHz radio signal to each "registered" heater within a radius of 30 metres. Each RX panel heater has an inbuilt receiver designed to respond to a signal from the WCT 600/TX.

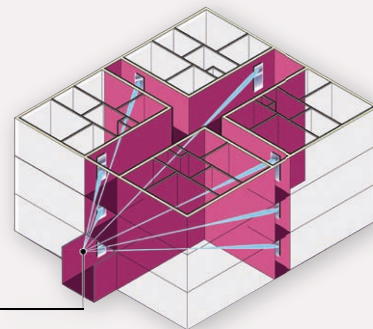

SPECIFICATION:

SURFACE TEMPERATURE RANGE: STANDARD 70°C

LINE REF	CODE	DIMENSIONS (H X W X D) MM	LED (WATTS)	ELEMENT (WATTS)	OUTPUT (WATTS)	OUTPUT (BTU'S)
Powder Coated White						
40.1	AUR 750D/PC/IP44/CUR/LED	750 x 500 x 62	30	750	600	2047
40.2	AUR 500D/PC/IP44/CUR/LED	1500 x 500 x 62	30	1500	1200	4094

TEMPERATURE RANGE: STANDARD 70°C


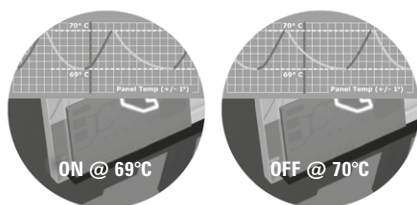


DIAGRAM:

Battery Kit wct600

CONTROLLERS

MK1 230V Mains Kit

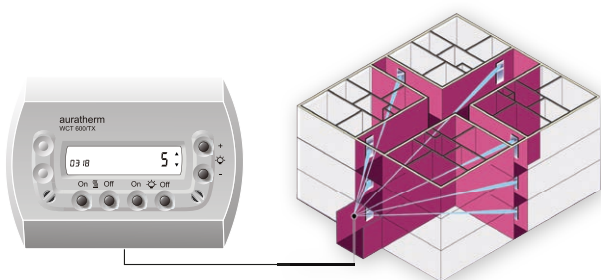

All local space heaters manufactured for sale in the EU after 1st January 2018 which use electricity, gaseous or liquid fuels, must comply with a minimum efficiency standard. This includes electric radiators, electric underfloor heating and electric and gas fires.

 **PROUDLY MANUFACTURED IN THE UK**

Ecolec Limited, Sharrocks Street, Wolverhampton WV1 3RP

Tel: 01902 457575 Fax: 01902 457797 Email: auratherm@ecolec.co.uk Website: www.ecolec.co.uk/auratherm