

Uniclass L7522	EPIC L22
CI/SfB (56.84)	X

# SPACE SAVING VERTICAL & HORIZONTAL POWDER COATED RADIANT PANEL

with Wireless Time and Temperature Control



**A simple to install wireless controlled heating system for the whole home and commercial applications.  
Perfect for apartments, public areas, offices, showrooms, shops, nurseries, schools, retirement homes and healthcare!**



**REF:** PC WHITE RAL 9016



**REF:** PC CREAM RAL 9001

ALSO AVAILABLE AS HORIZONTAL



**REF:** PC ECOLEC SILVER



**REF:** PC BLACK RAL 9005



**REF:** PC ECOELC BLUE



**REF:** PC ECOELC OLIVE GREEN

ALSO AVAILABLE AS HORIZONTAL



**REF:** PC ECOELC ORANGE



**REF:** PC RED RAL 3020


## RADIATOR (RECEIVER) KEY FEATURES:

Simply wire the heater to a fuse spur / Hidden wiring / No need to manually switch heaters "on" or "off"

## WIRELESS CONTROLLER (TRANSMITTER) KEY FEATURES:

Keylock mode / Simple to Programme / Up to 6 temperature settings per day / 7 day clock / Advance mode / Economy mode / Holiday mode / Boost Mode / Inbuilt room temperature sensor / Frost protection / Powered by 2 x 1.5v Alkaline batteries

The TX control unit sends a 433MHz radio signal to each "registered" heater within a radius of 30 metres. Each RX panel heater has an inbuilt receiver designed to respond to a signal from the WCT 100/RX.

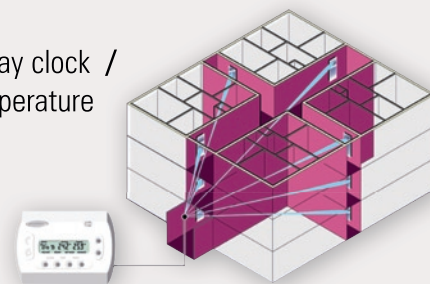

## SPECIFICATION:

LINE REF	CODE	DIMENSIONS (W X H X D)	ELEMENT (WATTS)	OUTPUT (WATTS)	OUTPUT (BTU'S)
<b>Powder Coated White</b>					
1.1	ECO 2000D/RP/PC/RX/V	500 x 2000 x 40	2000	1600	5459
1.2	ECO 1500D/RP/PC/RX/V	500 x 1500 x 40	1500	1200	4094
1.3	ECO 1000D/RP/PC/RX/V	500 x 1000 x 40	1000	800	2729
1.4	ECO 750D/RP/PC/RX/V	500 x 750 x 40	750	600	2047
1.5	ECO 500D/RP/PC/RX	500 x 500 x 40	500	400	1365
1.6	ECO 1000D/SB/RP/PC/RX/V	250 x 2000 x 40	1000	800	2729
1.7	ECO 750D/SB/RP/PC/RX/V	250 x 1500 x 40	750	600	2047
1.8	ECO 500D/SB/RP/PC/RX/V	250 x 1000 x 40	500	400	1365
<b>Powder Coated Silver</b>					
2.1	ECO 2000D/RP/PCS/RX/V	500 x 2000 x 40	2000	1600	5459
2.2	ECO 1500D/RP/PCS/RX/V	500 x 1500 x 40	1500	1200	4094
2.3	ECO 1000D/RP/PCS/RX/V	500 x 1000 x 40	1000	800	2729
2.4	ECO 750D/RP/PCS/RX/V	500 x 750 x 40	750	600	2047
2.5	ECO 500D/RP/PCS/RX	500 x 500 x 40	500	400	1365
2.6	ECO 1000D/SB/RP/PCS/RX/V	250 x 2000 x 40	1000	800	2729
2.7	ECO 750D/SB/RP/PCS/RX/V	250 x 1500 x 40	750	600	2047
2.8	ECO 500D/SB/RP/PCS/RX/V	250 x 1000 x 40	500	400	1365
<b>Powder Coated Black</b>					
3.1	ECO 2000D/RP/PCB/RX/V	500 x 2000 x 40	2000	1600	5459
3.2	ECO 1500D/RP/PCB/RX/V	500 x 1500 x 40	1500	1200	4094
3.3	ECO 1000D/RP/PCB/RX/V	500 x 1000 x 40	1000	800	2729
3.4	ECO 750D/RP/PCB/RX/V	500 x 750 x 40	750	600	2047
3.5	ECO 500D/RP/PCB/RX	500 x 500 x 40	500	400	1365
3.6	ECO 1000D/SB/RP/PCB/RX/V	250 x 2000 x 40	1000	800	2729
3.7	ECO 750D/SB/RP/PCB/RX/V	250 x 1500 x 40	750	600	2047
3.8	ECO 500D/SB/RP/PCB/RX/V	250 x 1000 x 40	500	400	1365

ALSO AVAILABLE IN HORIZONTAL FORMAT, WHEN ORDERING SIMPLY CHANGE THE LAST LETTER OF THE MODEL FROM 'V' TO 'H'

## NEW FEATURES! WIRELESS CONTROL WITH:



Classic  
WCT 100/TX



Touch Sensor  
WCT 200/TX





Landlord Control  
WCT 300/TX



Mirror/Light Control  
WCT 400/TX

## TEMPERATURE RANGE: STANDARD 70°C



Sharrocks Street, Wolverhampton WV1 3RP

Tel: **01902 457575** Fax: **01902 457797** Email: [sales@ecolec.co.uk](mailto:sales@ecolec.co.uk) Website: [www.ecolec.co.uk](http://www.ecolec.co.uk)