

Uniclass L7522	EPIC L22
CI/SfB (56.84)	X




Wireless Heating Systems

## SPACE SAVING IP44 MyPICTURE **WAVES** RADIATOR with Wireless Time and Temperature Control



A simple to install wireless controlled heating system.  
With your favorite image or corporate logo printed onto the radiator.

2000 x 500

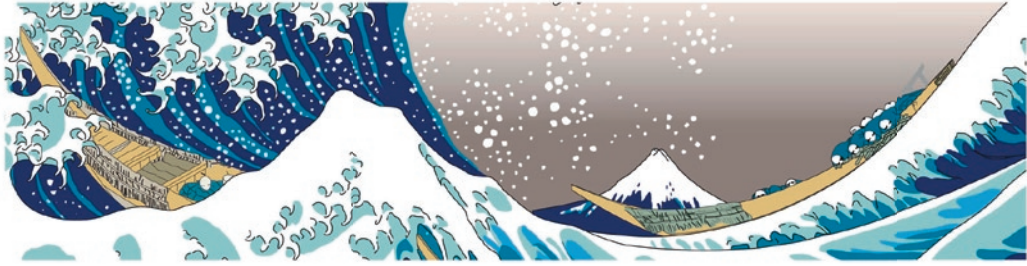

1500 x 500



1000 x 500



750 x 500



1000 x 1000

500 x 500




500 x 500




500 x 750



500 x 1000

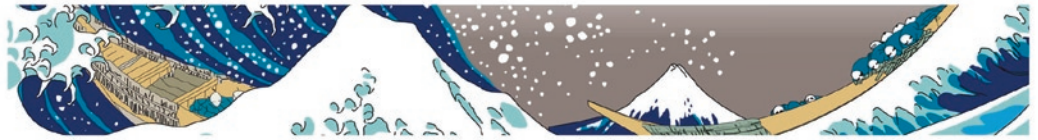

2000 x 250

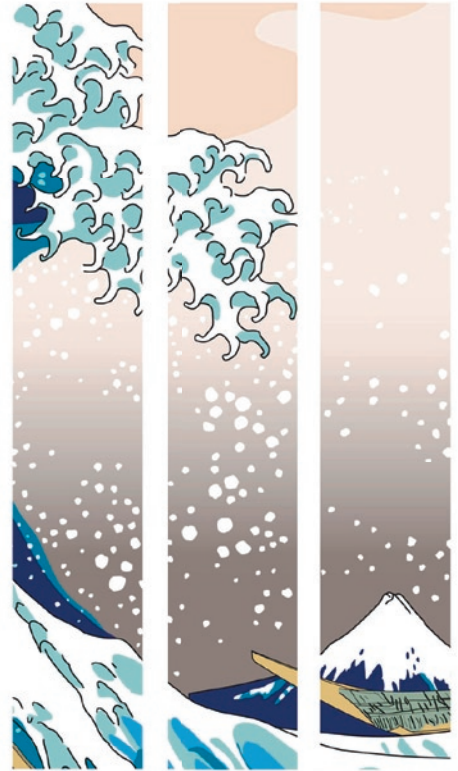

250 x 1500 Triptych



500 x 1500



500 x 2000



250 x 2000



250 x 1000 Triptych


## RADIATOR (RECEIVER) KEY FEATURES:

Printed image / Simply wire the heater to a fuse spur / Hidden wiring / No need to manually switch heaters "on" or "off"

## WIRELESS CONTROLLER (TRANSMITTER) KEY FEATURES:

Keylock mode / Simple to Programme / Up to 6 temperature settings per day / 7 day clock / Advance mode / Economy mode Holiday mode / Boost Mode / Inbuilt room temperature sensor / Frost protection / Powered by 2 x 1.5v Alkaline batteries


The TX control unit sends a 433MHz radio signal to each "registered" heater within a radius of 30 metres. Each RX panel heater has an inbuilt receiver designed to respond to a signal from the WCT 100/RX.

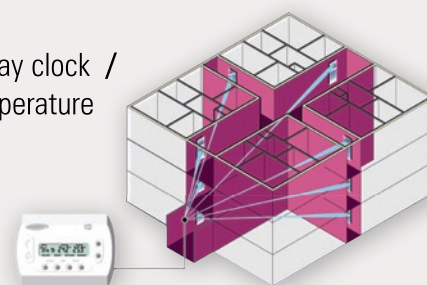

## SPECIFICATION:

LINE REF	CODE	DIMENSIONS (W X H X D)	ELEMENT (WATTS)	OUTPUT (WATTS)	OUTPUT (BTU'S)
22.1	ECO 2000D/IP44/WA/RX/V	500 x 2000 x 40	2000	1600	5459
22.2	ECO 1500D/IP44/WA/RX/V	500 x 1500 x 40	1500	1200	4094
22.3	ECO 1000D/IP44/WA/RX/V	500 x 1000 x 40	1000	800	2729
22.4	ECO 750D/IP44/WA/RX/V	500 x 750 x 40	750	600	2047
22.5	ECO 500D/IP44/WA/RX	500 x 500 x 40	500	400	1365
22.6	ECO 1000D/SB/IP44/WA/RX/V	250 x 2000 x 40	1000	800	2729
22.7	ECO 750D/SB/IP44/WA/RX/V	250 x 1500 x 40	750	600	2047
22.8	ECO 500D/SB/IP44/WA/RX/V	250 x 1000 x 40	500	400	1365
23.1	ECO 2000D/IP44/WA/RX/H	2000 x 500 x 40	2000	1600	5459
23.2	ECO 1500D/IP44/WA/RX/H	1500 x 500 x 40	1500	1200	4094
23.3	ECO 1000D/IP44/WA/RX/H	1000 x 500 x 40	1000	800	2729
23.4	ECO 750D/IP44/WA/RX/H	750 x 500 x 40	750	600	2047
23.5	ECO 500D/IP44/WA/RX	500 x 500 x 40	500	400	1365
23.6	ECO 1000D/SB/IP44/WA/RX/H	2000 x 250 x 40	1000	800	2729
23.7	ECO 750D/SB/IP44/WA/RX/H	1500 x 250 x 40	750	600	2047
23.8	ECO 500D/SB/IP44/WA/RX/H	1000 x 250 x 40	500	400	1365
24.1	ECO 1500D/IP44/WA/RX/V/3	500 x 1500 x 40 x3 Units	4500	3600	12276
24.2	ECO 750D/SB/IP44/WA/RX/V/3	250 x 1500 x 40 x3 Units	2250	1800	6138

## TEMPERATURE RANGE: STANDARD 70°C

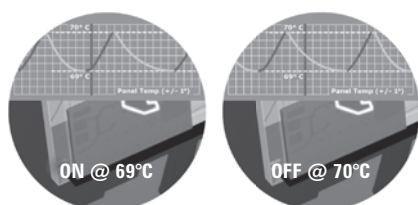

## NEW:

You can make any electrical product energy saving if you give it the right control. In the case of an electrical radiator you can do this by incorporating an air sensing thermostat and timer control. The Ecolec WCT/100TX has both these functions, and, as it is a battery powered unit, it is intended for safe use in bathrooms.

Ecolec delivers air sensor and timer controls at 433MHz by wireless to IP44 bathroom radiators which have an inbuilt receiver. The WAVES system is a truly innovative energy saving product to reach the bathroom industry in decades.

Buy your WAVES radiator today!

Sharrocks Street, Wolverhampton WV1 3RP

Tel: **01902 457575** Fax: **01902 457797** Email: **sales@ecolec.co.uk** Website: **www.ecolec.co.uk**