

Uniclass L7522	EPIC L22
CI/SfB (56.84)	X

SPACE SAVING VERTICAL IP44 SILVER MIRROR RADIATOR

with Wireless Time and Temperature Control



A new exciting and innovative product for the bathroom, hallway and bedroom!



REF: POWDER COATED SILVER



REF: POWDER COATED WHITE



REF: POWDER COATED BLACK


RADIATOR (RECEIVER) KEY FEATURES:

4mm silver mirrored glass / Simply wire the heater to a fuse spur / Hidden wiring / No need to manually switch heaters "on" or "off"

WIRELESS CONTROLLER (TRANSMITTER) KEY FEATURES:

Keylock mode / Simple to Programme / Up to 6 temperature settings per day / 7 day clock / Advance mode / Economy mode / Holiday mode / Boost Mode / Inbuilt room temperature sensor / Frost protection / Powered by 2 x 1.5v Alkaline batteries


The TX control unit sends a 433MHz radio signal to each "registered" heater within a radius of 30 metres. Each RX panel heater has an inbuilt receiver designed to respond to a signal from the WCT 100/RX.

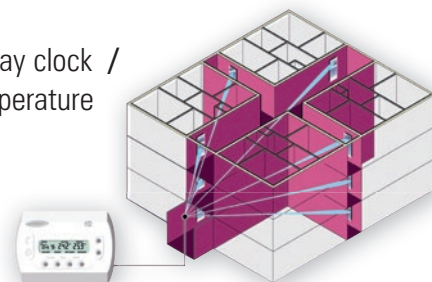

SPECIFICATION:

LINE REF	CODE	DIMENSIONS (H X W X D) MM	ELEMENT (WATTS)	OUTPUT (WATTS)	OUTPUT (BTU'S)
5.1	ECO 500D/IP44/MR/RX/V	500 x 500 x 44	500	300	1023
5.2	ECO 500DL/IP44/MR/RX/V	750 x 500 x 44	750	450	1535
5.3	ECO 1000D/IP44/MR/RX/V	1000 x 500 x 44	1000	600	2047
5.4	ECO 1500D/IP44/MR/RX/V	1500 x 500 x 44	1500	900	3070
5.5	ECO 2000D/IP44/MR/RX/V	2000 x 500 x 44	2000	1300	4435
5.6	ECO 500D/SB/IP44/MR/RX/V	1000 x 250 x 44	500	300	1023
5.7	ECO 750D/SB/IP44/MR/RX/V	1500 x 250 x 44	750	450	1535
5.8	ECO 1000D/SB/IP44/MR/RX/V	2000 x 250 x 44	1000	600	2047
5.9	ECO 500D/IP44/MR/RX	620 x 620 x 44	500	300	1023

TEMPERATURE RANGE - STANDARD 70°C

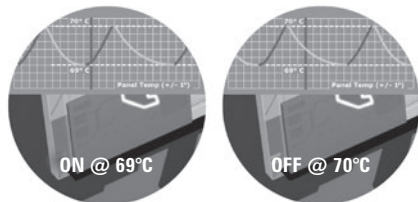

Sharrocks Street, Wolverhampton WV1 3RP

Tel: 01902 457575 Fax: 01902 457797 Email: sales@ecolec.co.uk Website: www.ecolec.co.uk