

Uniclass L7522	EPIC L22
CI/SfB (56.84)	X



Wireless Heating Systems

## SPACE SAVING VERTICAL IP44 COLOURED GLASS RADIATORS

with Wireless Time and Temperature Control

Lot 20  
compliant



*All local space heaters manufactured for sale in the EU after 1st January 2018 which use electricity, gaseous or liquid fuels, must comply with a minimum efficiency standard. This includes electric radiators, electric underfloor heating and electric and gas fires.*

 **PROUDLY MANUFACTURED IN THE UK**



**A new exciting and innovative product for the bathroom, hallway and bedroom!**

## RADIATOR (RECEIVER) KEY FEATURES:

Ebony black gloss tempered glass / Simply wire the heater to a fuse spur / Hidden wiring / No need to manually switch heaters "on" or "off"

## WIRELESS CONTROLLER (TRANSMITTER) KEY FEATURES:

Keylock mode / Simple to Programme / Up to 6 temperature settings per day / 7 day clock / Advance mode / Economy mode Holiday mode / Boost Mode / Inbuilt room temperature sensor / Frost protection / Powered by 2 x 1.5v Alkaline batteries

The TX control unit sends a 433MHz radio signal to each "registered" heater within a radius of 30 metres. Each RX panel heater has an inbuilt receiver designed to respond to a signal from the WCT 100/RX.




## SPECIFICATION:

LINE REF	CODE	DIMENSIONS (H X W X D) MM	ELEMENT (WATTS)	OUTPUT (WATTS)	OUTPUT (BTU'S)
4.1	ECO 500D/IP44/GR/RX	500 x 500 x 44	500	300	1023
4.2	ECO 750D/IP44/GR/RX	750 x 500 x 44	750	450	1535
4.3	ECO 1000D/IP44/GR/RX	1000 x 500 x 44	1000	600	2047
4.4	ECO 1500D/IP44/GR/RX	1500 x 500 x 44	1500	900	3070
4.5	ECO 2000D/IP44/GR/RX	2000 x 500 x 44	2000	1300	4435
4.6	ECO 500D/SB/IP44/GR/RX	1000 x 250 x 44	500	300	1023
4.7	ECO 750D/SB/IP44/GR/RX	1500 x 250 x 44	750	450	1535
4.8	ECO 1000D/SB/IP44/GR/RX	2000 x 250 x 44	1000	600	2047

ALL RAL COLOURS ARE AVAILABLE. PLEASE PHONE FOR A QUOTATION.

## TEMPERATURE RANGE: STANDARD 70°C

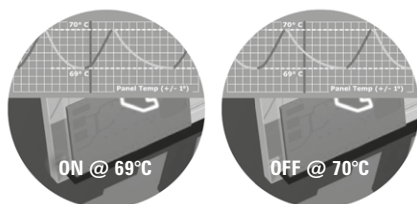

**WCT 100/TX  
AIR SENSOR THERMOSTAT**

## Battery Kit WCT100, WCT500

### CONTROLLERS


## MK1 230V Mains Kit

### NEW FEATURES!

### SURFACE TEMPERATURE SETTING:



WCT 500/TX/70



Press the two buttons as shown until current surface temperature is display. Then adjust to required temperature using the arrow buttons.



**NO PLUMBING, NO GUARDS, NO PIPEWORK, EASY PLUG AND PLAY INSTALLATION.**

Sharrocks Street, Wolverhampton WV1 3RP

Tel: **01902 457575** Fax: **01902 457797** Email: **sales@ecolec.co.uk** Website: **www.ecolec.co.uk**



Hereby, Ecolec Limited, declares that the radio equipment type thermostat and gateway are in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:  
[www.ecolec.co.uk/support](http://www.ecolec.co.uk/support)

© Ecolec © Ecolec 1995-2018. All rights reserved  
Ecolec is a registered trademark of Ecolec Limited  
All specifications subject to change without notice



Product of the EU.

Proudly Manufactured in the UK.