

Uniclass L7522	EPIC L22
CI/SfB (56.84)	X



## SPACE SAVING VERTICAL & HORIZONTAL POWDER COATED RADIANT PANEL

Compatible with Nest, Honeywell, KNX, Raspberry Pi and other controllers



## COLOUR OPTIONS



RAL 1014 IVORY



RAL 5002 ULTRAMARINE BLUE



RAL 7024 GRAPHITE GREY



RAL 1015 LIGHT IVORY



RAL 5015 SKY BLUE



RAL 7032 PEBBLE GREY



RAL 5008 GREY BLUE



RAL 5024 PASTEL BLUE



RAL 7047 TELE GREY



RAL 3003 RUBY RED



RAL 6019 PASTEL GREEN



RAL 8004 COPPER BROWN



RAL 3022 SALMON PINK



RAL 6034 PASTEL TURQUOISE




RAL 8017 CHOCOLATE BROWN



RAL 4009 PASTEL VIOLET



RAL 7016 ANTHRACITE GREY



RAL 9001 CREAM


## Why **ecolec**<sup>®</sup> use **Solid State Switching** technology

**Long Life** - Solid state switches have no moving parts. Therefore there is no mechanical wear and tear of the output contacts. Ideal for repetitive applications.

**Quiet Operation** - Solid state switching solutions make no acoustical noise when the output contacts change states. This is highly desirable in most domestic, commercial and medical applications.

**Minimum Electrical Noise** - Zero voltage turn-on and zero current turn-off allows for minimum electrical disturbances.

**Fast Switching** - Burst control can be easily achieved to provide accurate AC power control.



**We use Triacs**  
(a semi-conductor device)

## RADIATOR KEY FEATURES:

Simply wire the heater to a fused spur and a 15amp Relay / Cable Length 2m / Cable exit on the rear / Fitting Kit Supplied / On/Off Switch located on the side


## SPECIFICATION:

LINE REF	CODE	DIMENSIONS (H X W X D) MM	ELEMENT (WATTS)	OUTPUT (WATTS)	OUTPUT (BTU'S)
<b>Powder Coated White</b>					
20.1	ECO 2000D/RP/PC/RZ	2000 x 500 x 40	2000	1600	5459
20.2	ECO 1500D/RP/PC/RZ	1500 x 500 x 40	1500	1200	4094
20.3	ECO 1000D/RP/PC/RZ	1000x 500 x 40	1000	800	2729
20.4	ECO 750D/RP/PC/RZ	750 x 500 x 40	750	600	2047
20.5	ECO 500D/RP/PC/RZ	500 x 500 x 40	500	400	1365
20.6	ECO 1000D/SB/RP/PC/RZ	2000 x 250 x 40	1000	800	2729
20.7	ECO 750D/SB/RP/PC/RZ	1500 x 250 x 40	750	600	2047
20.8	ECO 500D/SB/RP/PC/RZ	1000 x 250 x 40	500	400	1365
<b>Powder Coated Silver</b>					
21.1	ECO 2000D/RP/PCS/RZ	2000 x 500 x 40	2000	1600	5459
21.2	ECO 1500D/RP/PCS/RZ	1500 x 500 x 40	1500	1200	4094
21.3	ECO 1000D/RP/PCS/RZ	1000x 500 x 40	1000	800	2729
21.4	ECO 750D/RP/PCS/RZ	750 x 500 x 40	750	600	2047
21.5	ECO 500D/RP/PCS/RZ	500 x 500 x 40	500	400	1365
21.6	ECO 1000D/SB/RP/PCS/RZ	2000 x 250 x 40	1000	800	2729
21.7	ECO 750D/SB/RP/PCS/RZ	1500 x 250 x 40	750	600	2047
21.8	ECO 500D/SB/RP/PCS/RZ	1000 x 250 x 40	500	400	1365
<b>Powder Coated Black</b>					
22.1	ECO 2000D/RP/PCB/RZ	2000 x 500 x 40	2000	1600	5459
22.2	ECO 1500D/RP/PCB/RZ	1500 x 500 x 40	1500	1200	4094
22.3	ECO 1000D/RP/PCB/RZ	1000x 500 x 40	1000	800	2729
22.4	ECO 750D/RP/PCB/RZ	750 x 500 x 40	750	600	2047
22.5	ECO 500D/RP/PCB/RZ	500 x 500 x 40	500	400	1365
22.6	ECO 1000D/SB/RP/PCB/RZ	2000 x 250 x 40	1000	800	2729
22.7	ECO 750D/SB/RP/PCB/RZ	1500 x 250 x 40	750	600	2047
22.8	ECO 500D/SB/RP/PCB/RZ	1000 x 250 x 40	500	400	1365

ALSO AVAILABLE IN HORIZONTAL FORMAT, WHEN ORDERING SIMPLY CHANGE THE LAST LETTER OF THE MODEL FROM 'V' TO 'H'

- **Selected Powder Coated RAL COLOURS available for additional charge to Line Ref. 20.1 to 22.8**

## TEMPERATURE RANGE: STANDARD 70°C

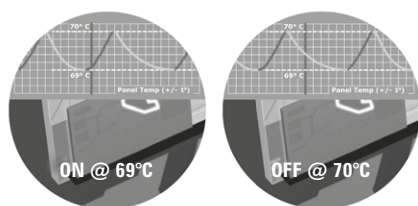

Sharrocks Street, Wolverhampton WV1 3RP

Tel: **01902 457575** Fax: **01902 457797** Email: **sales@ecolec.co.uk** Website: **www.ecolec.co.uk**